



869-B

869-B

HALF-WAVE MERCURY-VAPOR RECTIFIER

GENERAL DATA

Electrical:

Filamentary Cathode, Coated:

Voltage $5 \pm 5\%$ ac volts


Current 19 amperes

Minimum Heating Time
at Rated Voltage . . . 60 seconds

Peak Tube Voltage
Drop (Approx.) 15 volts

Mechanical:

Terminal Connections:



F₁ - Filament,
Cathode Shield
(Anode Return)

F₂ - Filament
Cap - Anode

Mounting Position Vertical with filament end down

Overall Length $14-1/4" \pm 3/16"$

Maximum Diameter $5-1/8"$

Bulb GT-40

Cap Skirted Large { JETEC No. C1-9
RCA No. 3905

Base { JETEC No. A3-20
RCA No. 3502

Temperature Control:

Heating—When the ambient temperature is so low that the normal rise of condensed-mercury temperature above the ambient temperature will not bring the condensed-mercury temperature up to the minimum value of the operating ranges specified under *Maximum Ratings*, some form of heat-conserving enclosure or auxiliary heater will be required.

Cooling—When the operating conditions are such that the maximum value of the operating condensed-mercury temperature range is exceeded, provision should be made for forced-air cooling sufficient to prevent exceeding the maximum value.

Temperature Rise of Condensed Mercury to Equilibrium Above Ambient Temperature (Approx.):*

No Load	15	°C
Full Load	20	°C

HALF-WAVE RECTIFIER—In-Phase Operation*

Maximum Ratings, Absolute Values: For supply frequency of 60 cps

Operating Condensed-Mercury
Temperature Range

30° to 60°C 30° to 50°C 30° to 40°C

PEAK INVERSE ANODE VOLTAGE	10000 max.	15000 max.	20000 max.	volts
----------------------------	------------	------------	------------	-------

*: See next page.



HALF-WAVE MERCURY-VAPOR RECTIFIER

	Operating Condensed-Mercury Temperature Range			
	30° to 60°C	30° to 50°C	30° to 40°C	
ANODE CURRENT:				
Peak	10 max.	10 max.	10 max.	amp
Average** . . .	2.5 max.	2.5 max.	2.5 max.	amp
Fault, for dura- tion of 0.1 second max.	•	•	•	amp
	100 max.	100 max.	100 max.	amp

HALF-WAVE RECTIFIER—Quadrature Operation**

Maximum Ratings, Absolute Values: For supply frequency of 60 cps

	Operating Condensed-Mercury Temperature Range			
	30° to 60°C	30° to 50°C	30° to 40°C	
PEAK INVERSE ANODE VOLTAGE				
	10000 max.	15000 max.	20000 max.	volts
ANODE CURRENT:				
Peak	20 max.	20 max.	10 max.	amp
Average** . . .	5 max.	5 max.	2.5 max.	amp
Fault, for dura- tion of 0.1 second max.	•	•	•	amp
	100 max.	100 max.	100 max.	amp

CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Filament Current	1	-	21	amp
Critical Anode Voltage . . .	2	-	100	volts
Peak Tube Voltage Drop . . .	3	-	17	volts

Note 1: With 5 volts rms on filament.

Note 2: With 4.75 volts rms on filament, and condensed-mercury temperature at 30°C.

Note 3: With 5 volts rms on filament, condensed-mercury temperature of 35°±5°C, peak anode current of 50 amperes provided by half-cycle pulse from a 60-cps sine wave and recurring approximately once a second. Tube drop is measured by an oscilloscope connected between anode and center tap of filament transformer.

* With filament volts = 4.75 and no heat-conserving enclosure.

• Filament voltage in phase with anode voltage.

•• Filament voltage out of phase (60° to 120°) with anode voltage.

** Averaged over any period of 30 seconds maximum.

OPERATING NOTES

X-Ray Warning. X-rays are produced when the 869-B is operated with a peak inverse anode voltage above 16000 volts (absolute value). These rays can constitute a health hazard unless the tube is adequately shielded for x-ray radiation.



869-B

869-B

HALF-WAVE MERCURY-VAPOR RECTIFIER

For Circuit Figures, see Front of this Section

CIRCUIT	MAX. TRANS. SEC. VOLTS (RMS)	APPROX. DC OUTPUT VOLTS TO FILTER	MAX. DC OUTPUT AMPERES	MAX. DC OUTPUT KW TO FILTER		
	E	E_{av}	I_{av}	P_{dc}		
Fig. 1 Half-Wave Single-Phase In-Phase Operation	14000 [□]	6300	2.5	16		
	10600 [▲]	4700	2.5	12		
	7000 [*]	3100	2.5	8		
Fig. 2 Full-Wave Single-Phase In-Phase Operation	7000 [□]	6300	5.0	32		
	5300 [▲]	4700	5.0	24		
	3500 [*]	3100	5.0	16		
Fig. 3 Series Single-Phase In-Phase Operation	14000 [□]	12700	5.0	64		
	10600 [▲]	9500	5.0	48		
	7000 [*]	6300	5.0	32		
Fig. 4 Half-Wave Three-Phase In-Phase Operation	8100 [□]	9500	7.5	72		
	6100 [▲]	7100	7.5	54		
	4000 [*]	4700	7.5	36		
Fig. 5 Parallel Three-Phase Quadrature Operation	8100 [□]	9500	15.0	143		
	6100 [▲]	7100	30.0	215		
	4000 [*]	4700	30.0	143		
Fig. 6 Series Three-Phase Quadrature Operation	8100 [□]	19000	7.5	143		
	6100 [▲]	14200	15.0	215		
	4000 [*]	9500	15.0	143		
Fig. 7 Half-Wave Four-Phase Quadrature Operation			Resis- tive Load	Induc- tive Load	Resis- tive Load	Induc- tive Load
	7000 [□]	9000	9.0	10.0	81	90
	5300 [▲]	6700	18.0	20.0	121	135
	3500 [*]	4500	18.0	20.0	81	90
Fig. 8 Half-Wave Six-Phase Quadrature Operation			Resis- tive Load	Induc- tive Load	Resis- tive Load	Induc- tive Load
	7000 [□]	9500	9.5	10.0	91	96
	5300 [▲]	7100	19.0	20.0	136	143
	3500 [*]	4700	19.0	20.0	91	96

□ For maximum peak inverse anode voltage of 20000 volts, and condensed mercury-temperature range of 30° to 40°C.

▲ For maximum peak inverse anode voltage of 15000 volts, and condensed mercury-temperature range of 30° to 50°C.


* For maximum peak inverse anode voltage of 10000 volts, and condensed mercury-temperature range of 30° to 60°C.

869-B



869-B

HALF-WAVE MERCURY-VAPOR RECTIFIER

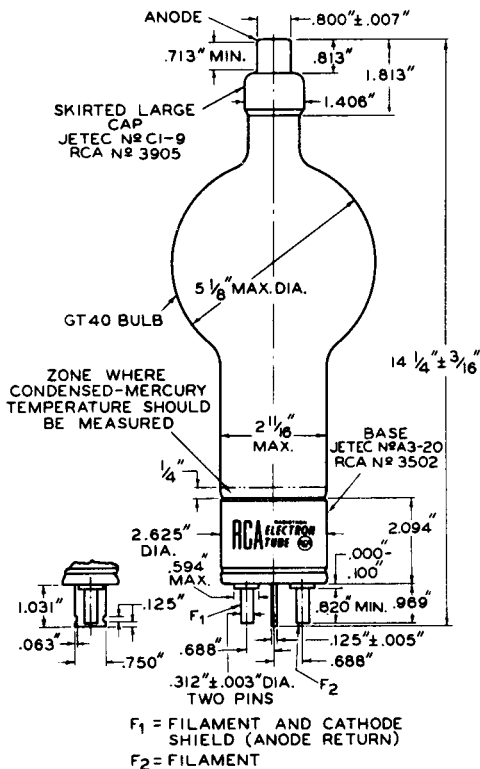

92CM-4330R4

NOV. 1, 1952

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


CE-4330R4



869-B

869-B

RATE OF RISE OF COND.-MERCURY TEMPERATURE

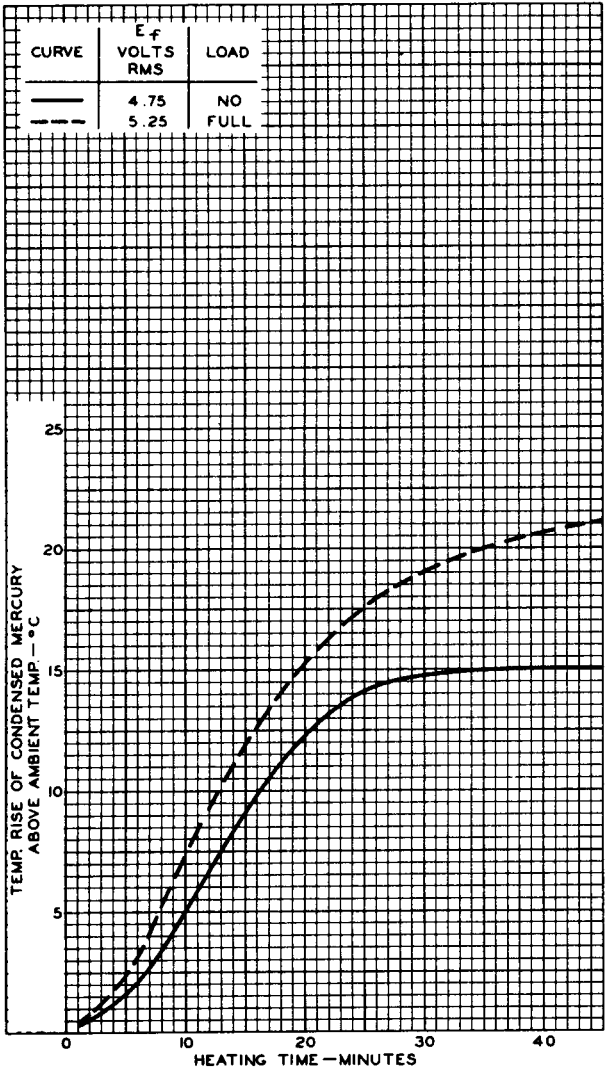

APRIL 12, 1951

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7634