



**ELECTRONIC
INNOVATIONS**
IN ACTION

TUBES

— PRODUCT INFORMATION —

18AJ10

**Compactron
Dissimilar Double Pentode**

• **LOW HEATER POWER**

• **140 VOLTS B+**

• **HIGH SENSITIVITY SOUND DETECTOR**

The 18AJ10 is a compactron containing a sharp-cutoff, dual-control pentode (Section 2) and a power pentode (Section 1). The dual-control pentode is intended for use as an FM detector and the power pentode as an audio-frequency output amplifier in television receivers.

GENERAL

ELECTRICAL

Cathode - Coated Unipotential

Heater Characteristics and Ratings

Heater Voltage, AC or DC* 18 Volts
Heater Current† 0.315 ± 0.02 Amperes
Heater Warm-up Time, average‡ 11 Seconds

Direct Interelectrode Capacitances, approximate§

Section 1

Grid-Number 1 to Plate: (1g1 to 1p) 0.24 pf
Input: 1g1 to (h + 1k + 1g2 + b.p. + 2k + i.s.) 9.5 pf
Output: 1p to (h + 1k + 1g2 + b.p. + 2k + i.s.) 10 pf

Section 2

Grid-Number 1 to Plate: (2g1 to 2p) 0.036 pf
Grid-Number 3 to Plate: (2g3 to 2p) 3.0 pf
Grid-Number 1 to All Except Plate: 2g1 to (h + 2k + 2g2 + 2g3 + i.s.) 7.0 pf
Grid-Number 3 to All: 2g3 to (h + 2k + 2g1 + 2g2 + 2p + i.s.) 7.8 pf
Grid-Number 1 to Grid-Number 3: (2g1 to 2g3) . . . 0.14 pf

Coupling

Plate, Section 1 to Plate, Section 2: (1p to 2p) . . . 0.17 pf

MECHANICAL

Operating Position - Any


Envelope - T-9, Glass

Base - E12-70, Button 12-Pin

Outline Drawing - EIA 9-59

Maximum Diameter 1.188 Inches
Minimum Diameter 1.062 Inches
Maximum Over-all Length 2.625 Inches
Maximum Seated Height 2.250 Inches
Minimum Seated Height 2.000 Inches

PHYSICAL DIMENSIONS

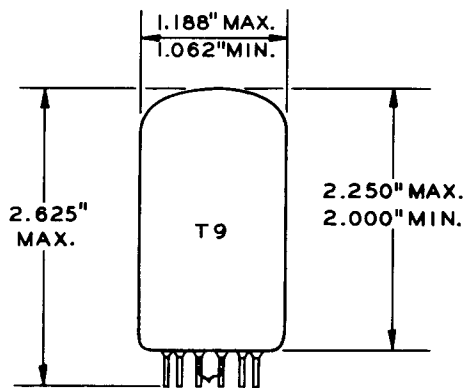


EIA 9-59

TERMINAL CONNECTIONS

- Pin 1 - Heater
- Pin 2 - Cathode (Section 2) and Internal Shield
- Pin 3 - Grid Number 1 (Section 2)
- Pin 4 - No Connection
- Pin 5 - Grid Number 3 (Suppressor)(Section 2)
- Pin 6 - Grid Number 2 (Screen)(Section 2)
- Pin 7 - Plate (Section 2)
- Pin 8 - Grid Number 1 (Section 1)
- Pin 9 - Cathode and Beam Plates (Section 1)
- Pin 10 - Grid Number 2 (Screen)(Section 1)
- Pin 11 - Plate (Section 1)
- Pin 12 - Heater

BASING DIAGRAM

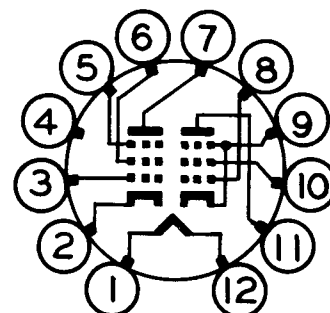

EIA 12EZ

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an

express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.

MAXIMUM RATINGS**DESIGN-MAXIMUM VALUES****Section 1**

Plate Voltage.....	165	Volts
Screen Voltage.....	150	Volts
Plate Dissipation.....	6.0	Watts
Screen Dissipation.....	1.25	Watts
DC Cathode Current.....	60	Milliamperes
Heater-Cathode Voltage		
Heater Positive with respect to Cathode		
DC Component.....	100	Volts
Total DC and Peak.....	200	Volts
Heater Negative with respect to Cathode		
Total DC and Peak.....	200	Volts
Grid-Number 1 Circuit Resistance		
With Cathode Bias.....	1.0	Megohms

Section 2

Plate Voltage.....	300	Volts
Suppressor Voltage		
Positive (DC + Peak).....	25	Volts
Negative (DC + Peak).....	100	Volts
Screen Supply Voltage.....	300	Volts
Screen Voltage - See Screen Rating Chart		
Positive DC Grid-Number 1 Voltage.....	0	Volts
Negative DC Grid-Number 1 Voltage.....	50	Volts
Plate Dissipation.....	1.7	Watts
Suppressor Dissipation.....	0.1	Watts
Screen Dissipation.....	1.0	Watts
Heater-Cathode Voltage		
Heater Positive with respect to Cathode		
DC Component.....	100	Volts
Total DC and Peak.....	200	Volts
Heater Negative with respect to Cathode		
Total DC and Peak.....	200	Volts
Suppressor Circuit Resistance.....	0.5	Megohms
Grid-Number 1 Circuit Resistance		
With Fixed Bias.....	0.25	Megohms
With Cathode Bias.....	0.5	Megohms

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.

CHARACTERISTICS AND TYPICAL OPERATION

AVERAGE CHARACTERISTICS—CLASS A₁ AMPLIFIER

Section 1

Plate Voltage.....	145	Volts
Screen Voltage.....	110	Volts
Grid-Number 1 Voltage.....	-7.0	Volts
Peak AF Grid-Number 1 Voltage.....	7.0	Volts
Plate Resistance, approximate.....	33000	Ohms
Transconductance.....	5600	Micromhos
Zero-Signal Plate Current.....	.34	Milliamperes
Maximum-Signal Plate Current.....	.39	Milliamperes
Zero-Signal Screen Current.....	6.5	Milliamperes
Maximum-Signal Screen Current.....	9.3	Milliamperes
Load Resistance.....	2500	Ohms
Total Harmonic Distortion, approximate.....	.12	Percent
Maximum-Signal Power Output.....	1.45	Watts

AVERAGE CHARACTERISTICS


Section 2

Plate Voltage.....	150	Volts
Suppressor Voltage.....	0	Volts
Screen Voltage.....	100	Volts
Cathode-Bias Resistor.....	180	Ohms
Plate Resistance, approximate.....	0.18	Megohms
Grid-Number 1 Transconductance.....	2400	Micromhos
Grid-Number 3 Transconductance.....	750	Micromhos
Plate Current.....	2.8	Milliamperes
Screen Current.....	3.5	Milliamperes
Grid-Number 1 Voltage, approximate I _b = 20 Microamperes.....	-4	Volts
Grid-Number 3 Voltage, approximate I _b = 50 Microamperes.....	-3.5	Volts


NOTES

- * Heater voltage for a bogey tube at I_f = 0.315 amperes.
- † The equipment designer should design the equipment so that heater current is centered at the specified bogey value, with heater supply variations restricted to maintain heater current within the specified tolerance.
- ‡ The time required for the voltage across the heater to reach 80 percent of the bogey value after applying 4 times the bogey heater voltage to a circuit consisting of the tube heater in series with a resistance equal to 3 times the bogey heater voltage divided by the bogey heater current.
- § Without external shield.

AVERAGE PLATE CHARACTERISTICS

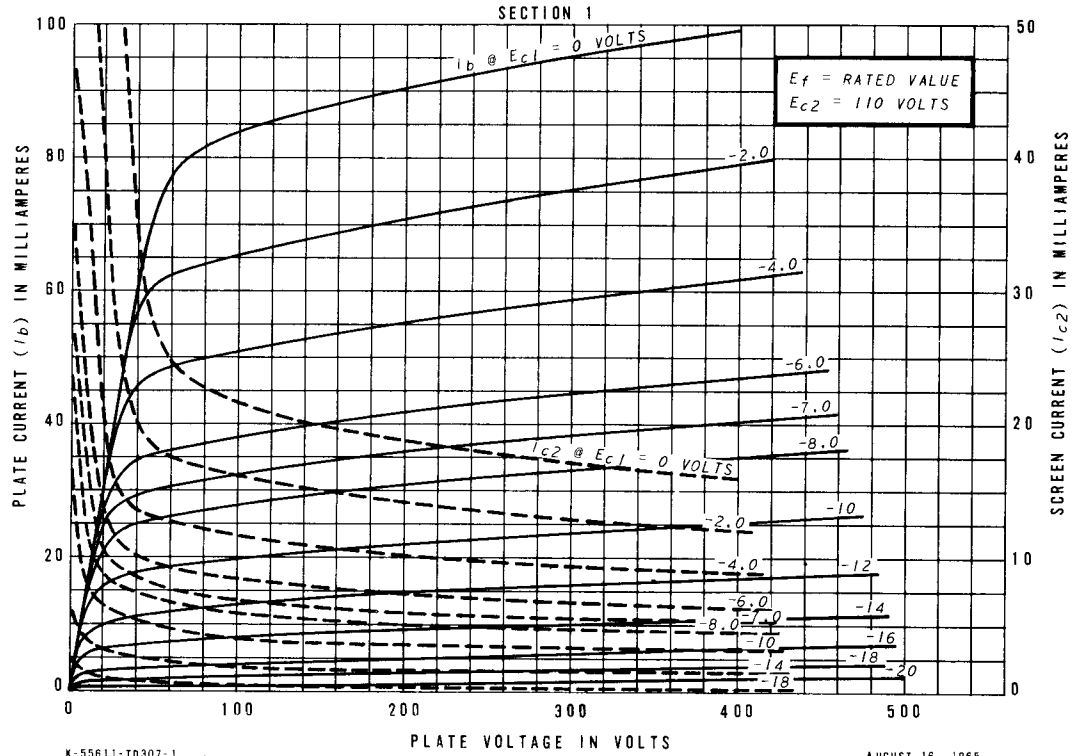


AVERAGE TRANSFER CHARACTERISTICS

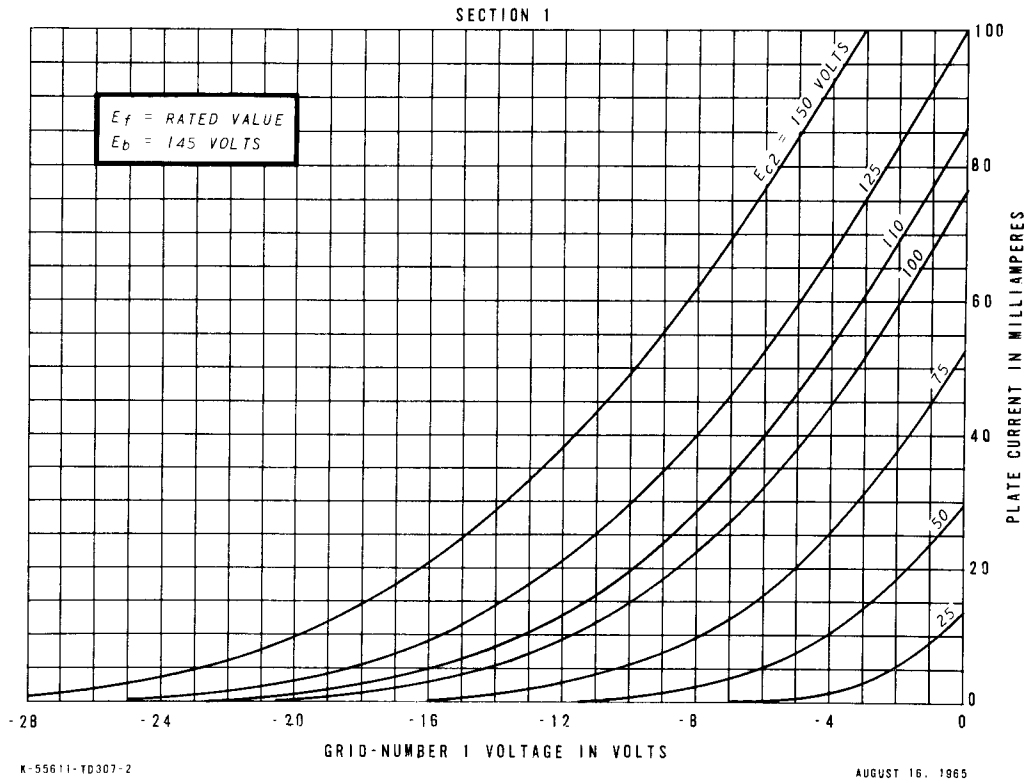

AVERAGE TRANSFER CHARACTERISTICS

SECTION 1

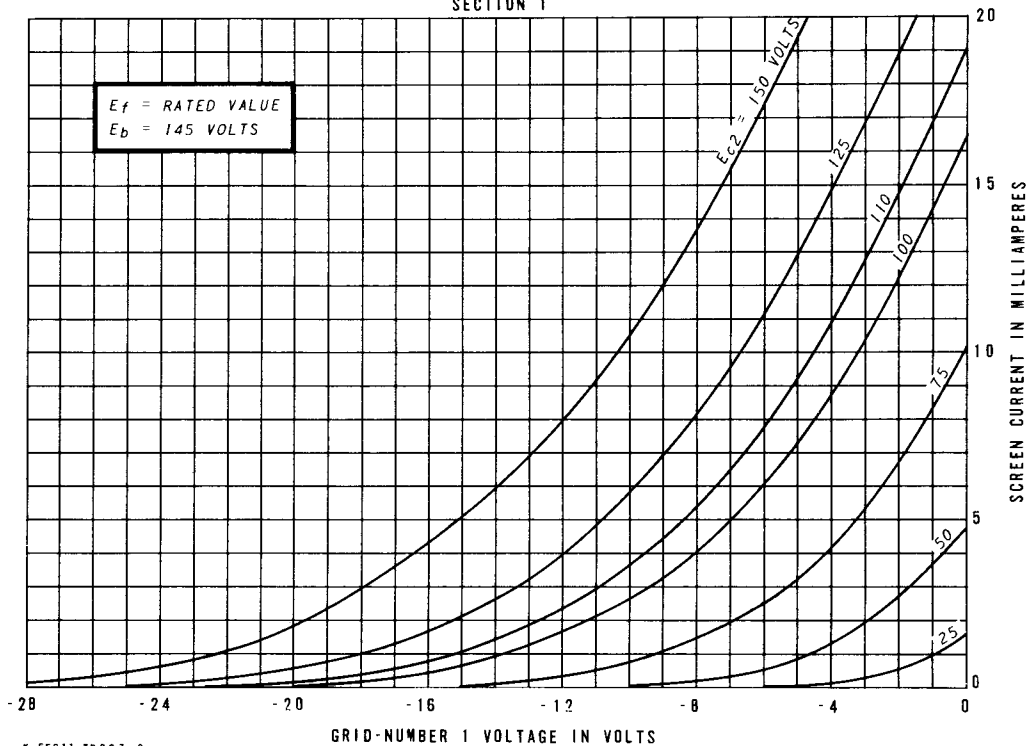


K-55611-TD307-3

AUGUST 16, 1965

SCREEN RATING CHART

SECTION 2

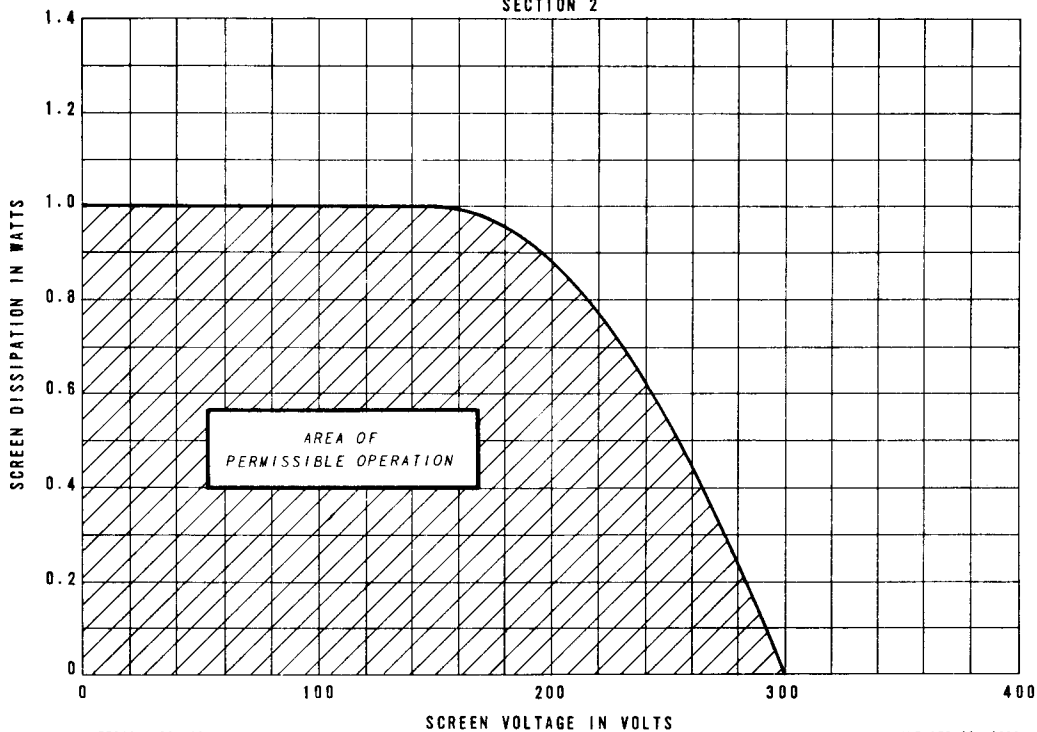


K-55611-TD337-15

NOVEMBER 30, 1968


AVERAGE PLATE CHARACTERISTICS

SECTION 2

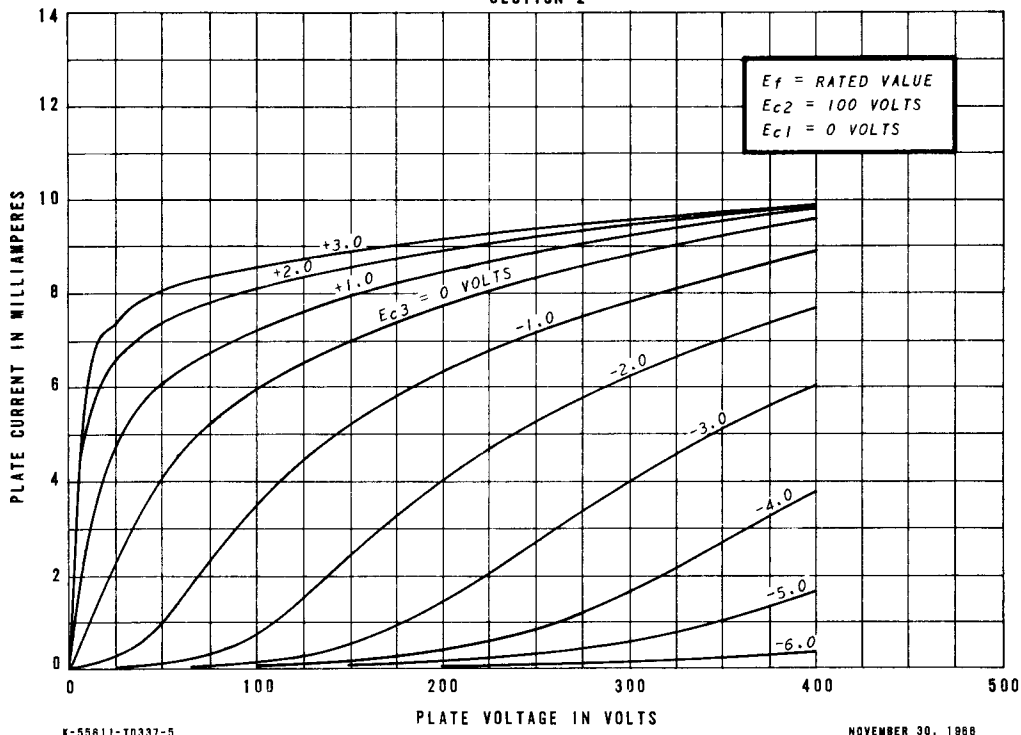


AVERAGE PLATE CHARACTERISTICS

SECTION 2

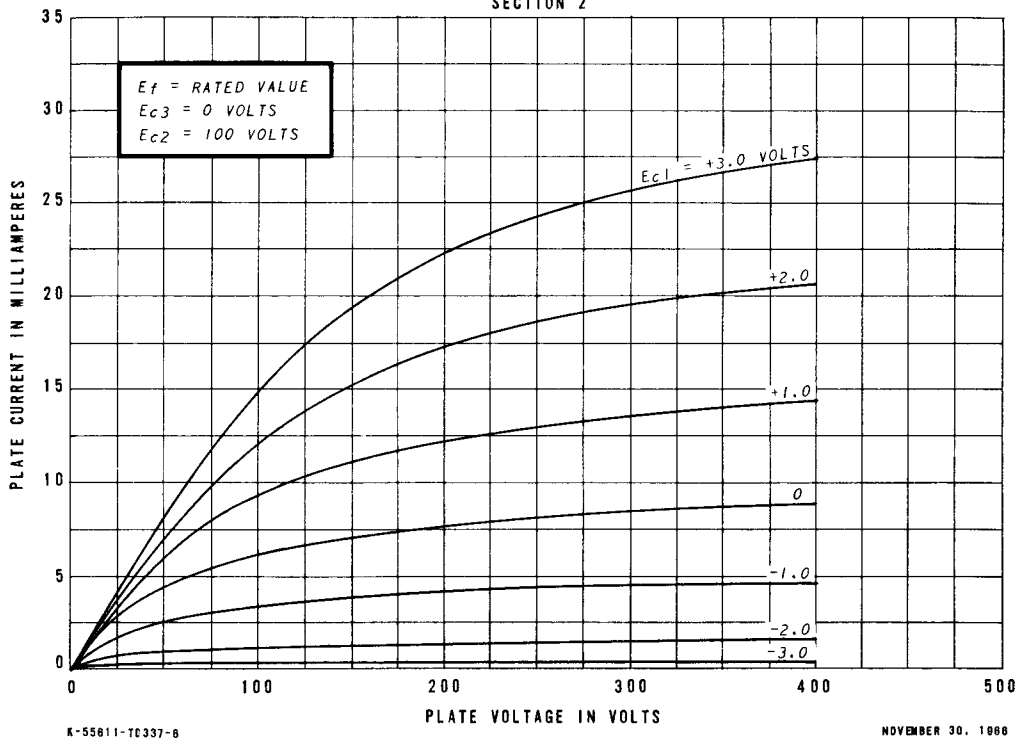


AVERAGE TRANSFER CHARACTERISTICS

SECTION 2

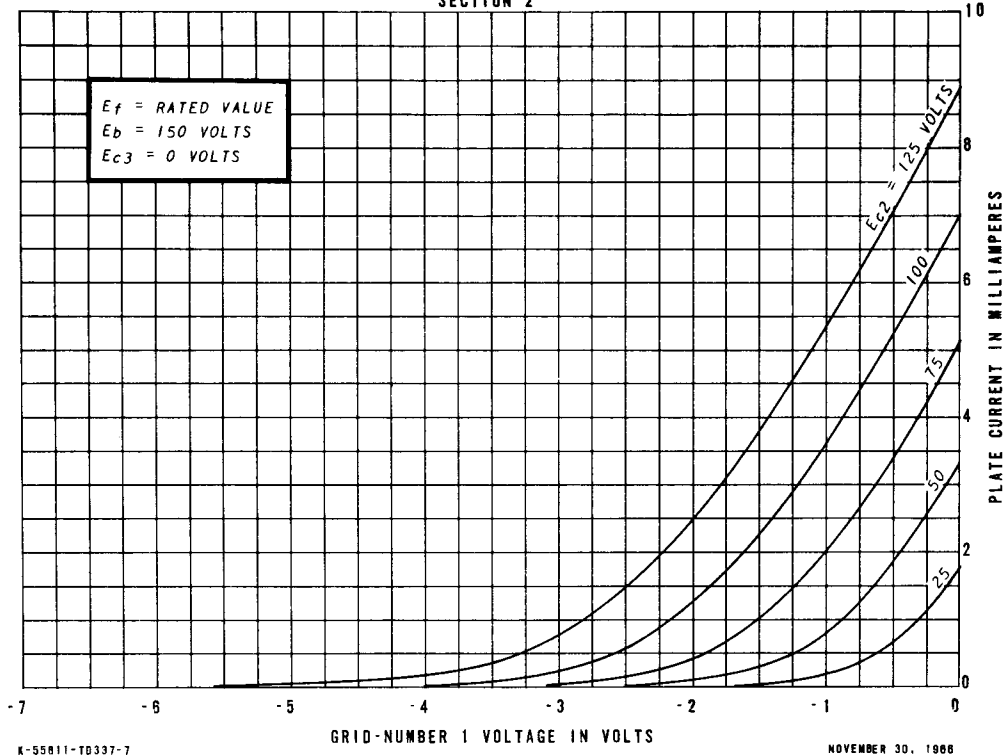


AVERAGE TRANSFER CHARACTERISTICS

SECTION 2

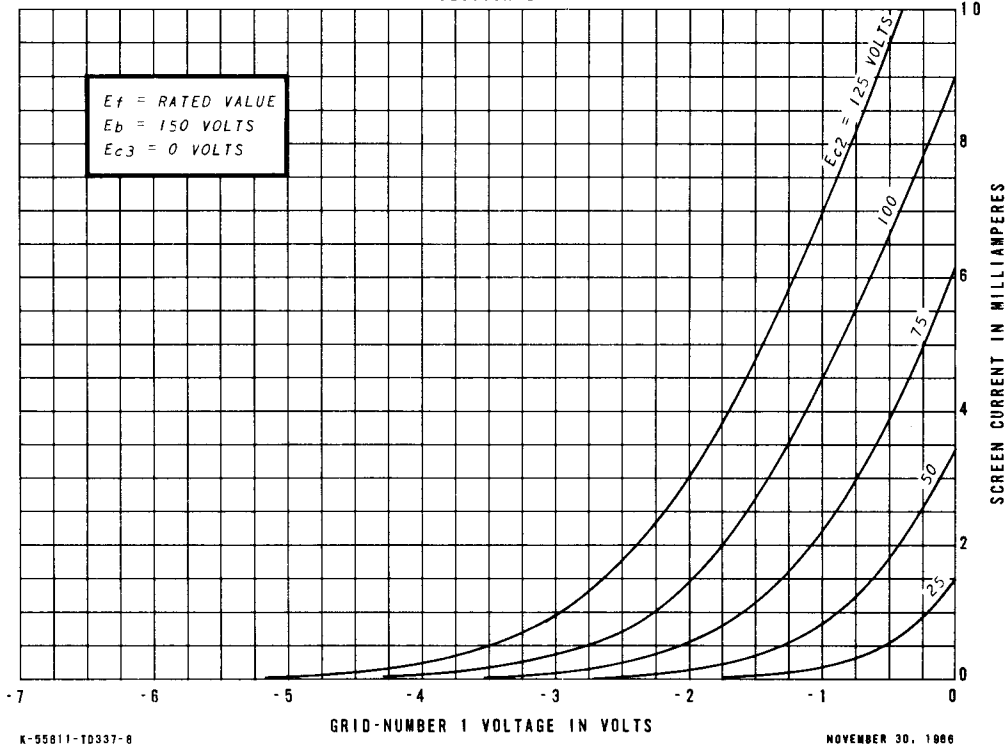


AVERAGE CHARACTERISTICS

SECTION 2

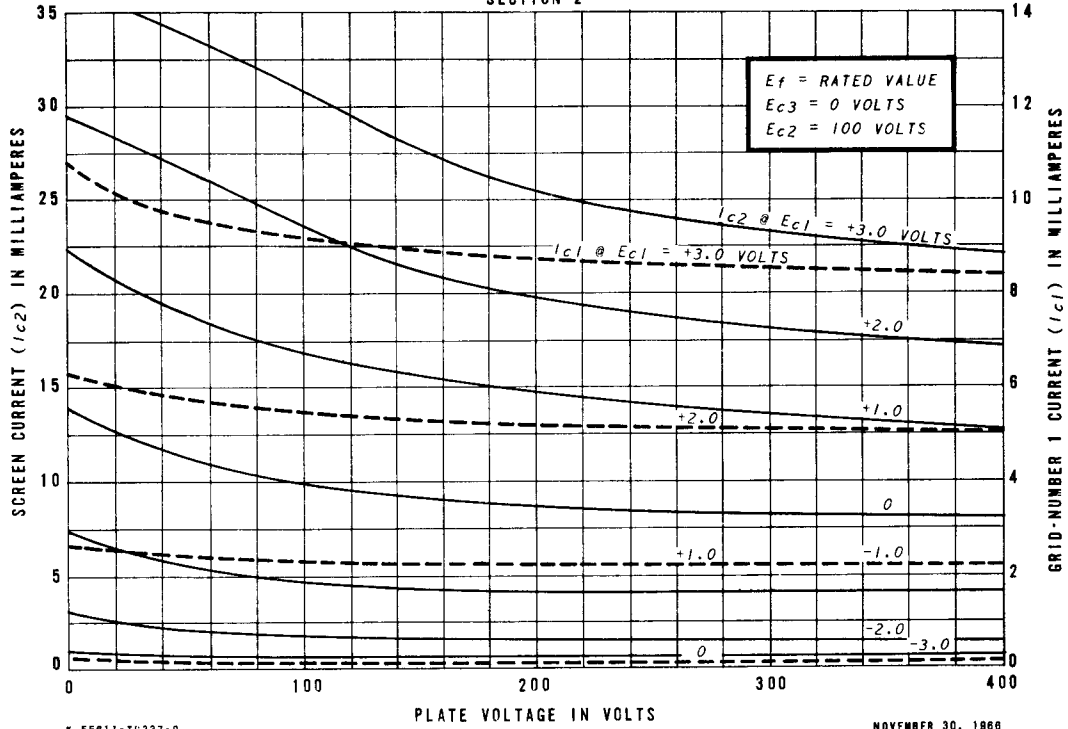


AVERAGE CHARACTERISTICS

SECTION 2

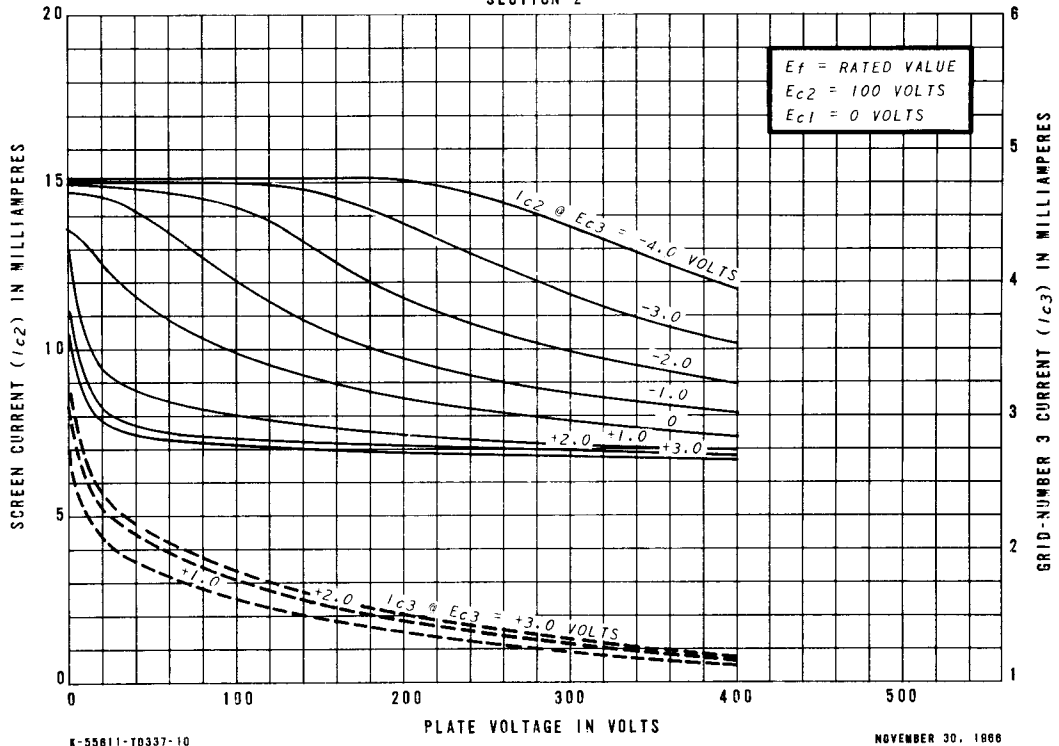


AVERAGE TRANSFER CHARACTERISTICS

SECTION 2

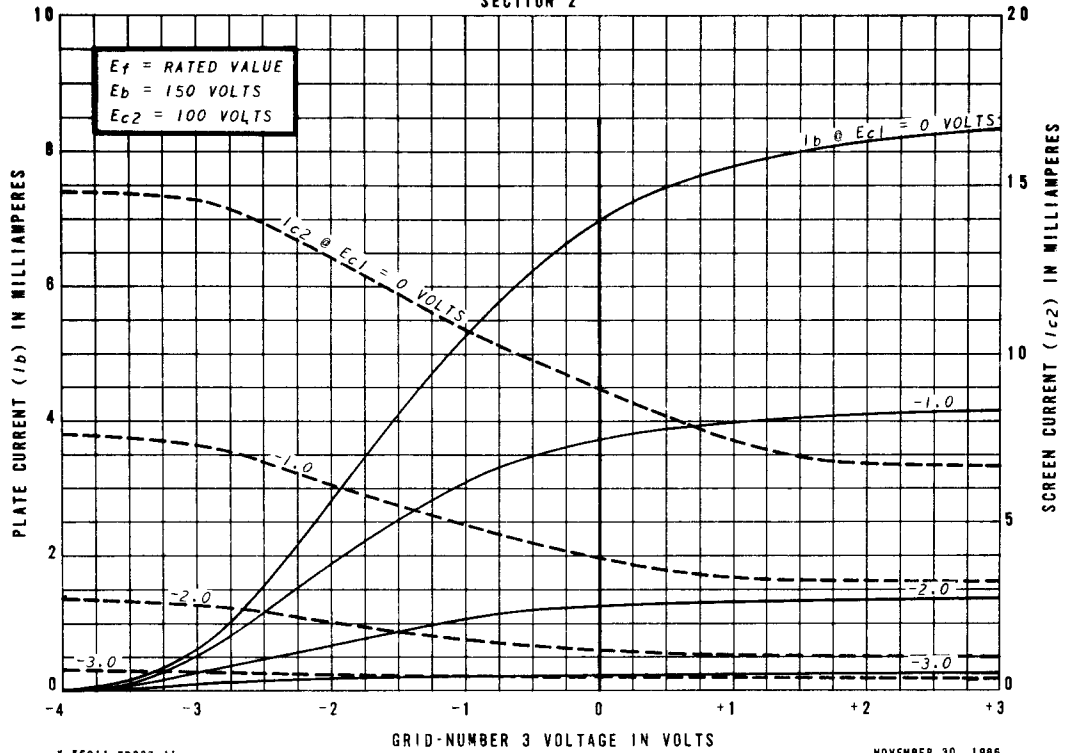


AVERAGE TRANSFER CHARACTERISTICS

SECTION 2

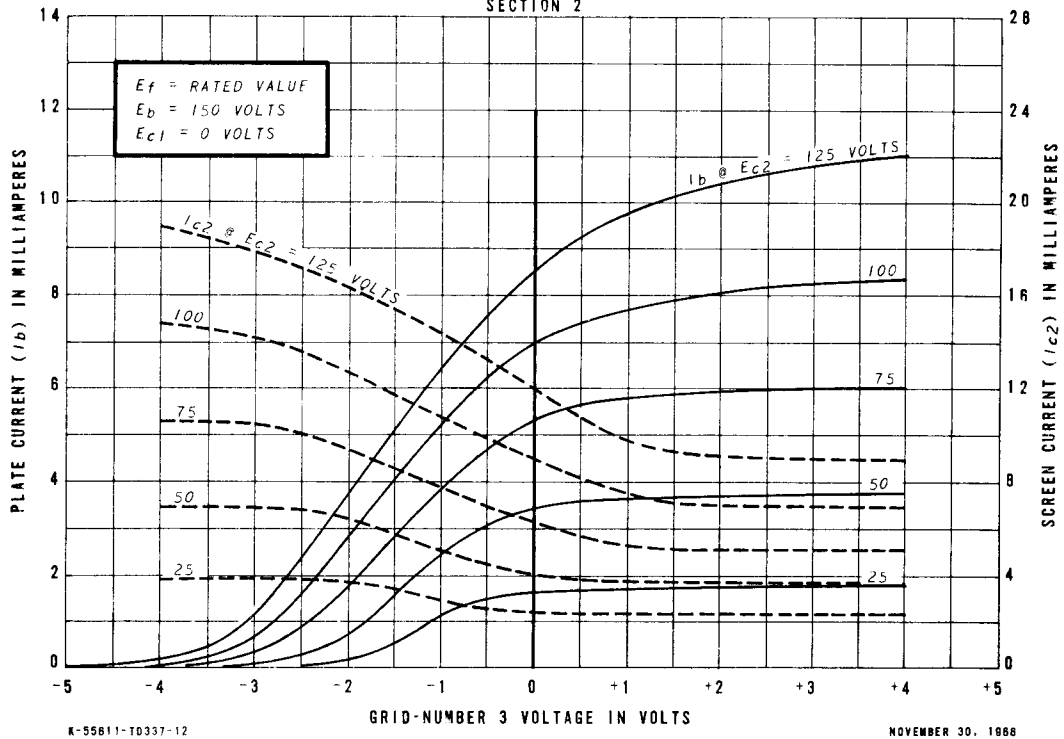

AVERAGE TRANSFER CHARACTERISTICS

SECTION 2

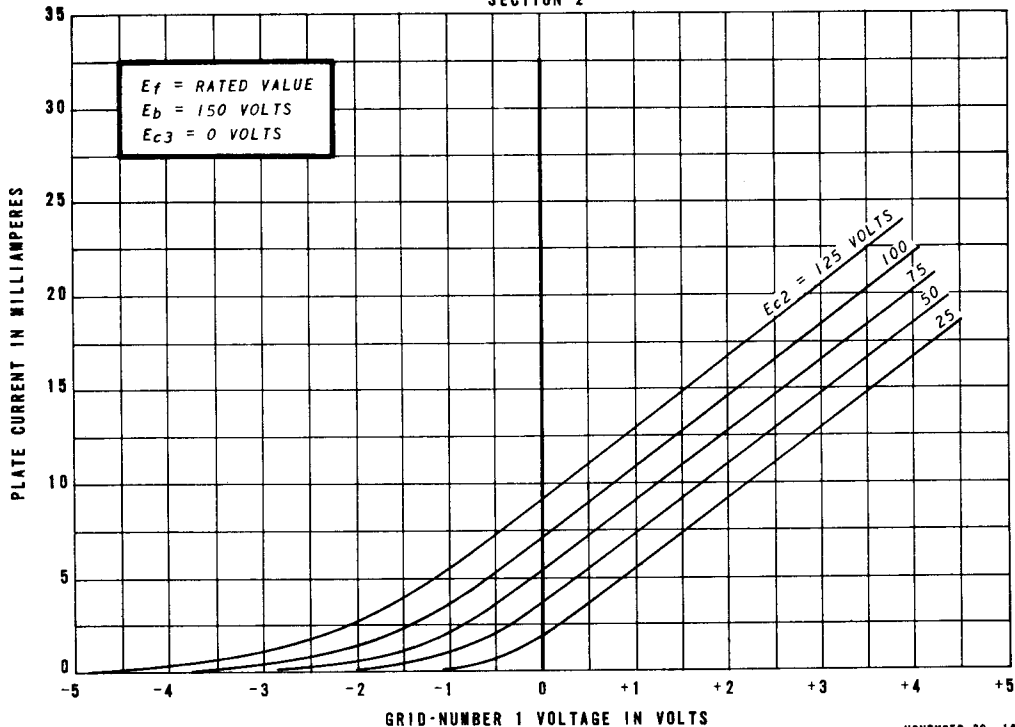


K-55811-TD337-13

NOVEMBER 30, 1968

AVERAGE TRANSFER CHARACTERISTICS

SECTION 2

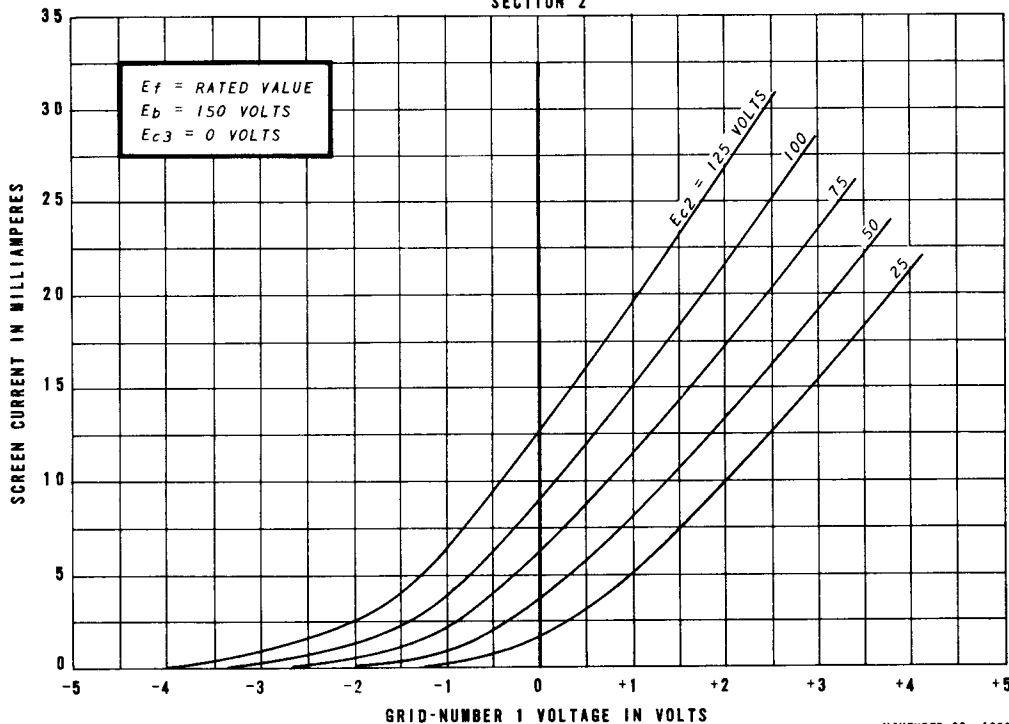

K-55811-TD337-14

NOVEMBER 30, 1968

TUBE DEPARTMENT

GENERAL  ELECTRIC

Owensboro, Kentucky 42301