



6SF7

6SF7

**DIODE - SUPER-CONTROL AMPLIFIER PENTODE**

SINGLE-ENDED METAL TYPE

Heater [■]	Coated Unipotential Cathode	
Voltage	6.3	a-c or d-c volts
Current	0.3	amp.
Direct Interelectrode Capacitances: ^o		
<i>Pentode Unit</i>		
Grid to Plate	0.004 max.	μf
Input	5.5	μf
Output	6.0	μf
<i>Pentode Grid to Diode</i>	0.002 max.	μf
<i>Pentode Plate to Diode</i>	0.8	μf
Maximum Overall Length	2-5/8"	
Maximum Seated Height	2-1/16"	
Maximum Diameter	1-5/16"	
Bulb	Metal Shell, MT-8	
Base	Small Wafer Octal 8-Pin	
Pin 1 - Shell	Pin 5 - Diode Plate	
Pin 2 - Pentode Grid	Pin 6 - Pentode Plate	
Pin 3 - Cathode	Pin 7 - Heater	
Pin 4 - Screen	Pin 8 - Heater	
Mounting Position	Any	



BOTTOM VIEW (7A2)

PENTODE UNIT - AMPLIFIER

Plate Voltage	300 max. volts	
Screen Voltage	100 max. volts	
Screen-Supply Voltage	300 max. volts	
Grid Voltage	0 min. volts	
Plate Dissipation	3.5 max. watts	
Screen Dissipation	0.5 max. watt	
<i>Typical Operation and Characteristics - Class A₁ Amplifier:</i>		
Plate	100	250 volts
Screen	100	100 volts
Grid	-1	-1 volts
Plate Resistance (Approx.)	0.2	0.7 megohm
Transconductance	1975	2050 μmhos
Grid Bias (Approx.) †	-35	-35 volts
Plate Current	12	12.4 ma.
Screen Current	3.4	3.3 ma.

DIODE UNIT - One

Consideration of this unit is similar to that given under Type 6B8-G with the exception that there is one diode in Type 6SF7. Diode curves shown under Type 6B7 apply to the 6SF7

[■] In circuits where the cathode is not directly connected to the heater, the potential difference between heater and cathode should be kept as low as possible.

^o With shell connected to cathode.

† For transconductance of 10 μmhos.

← Indicates a change.

Dec. 1, 1941

RCA RADIOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.


TENTATIVE DATA

6SF7



6SF7

AVERAGE PLATE CHARACTERISTICS PENTODE UNIT

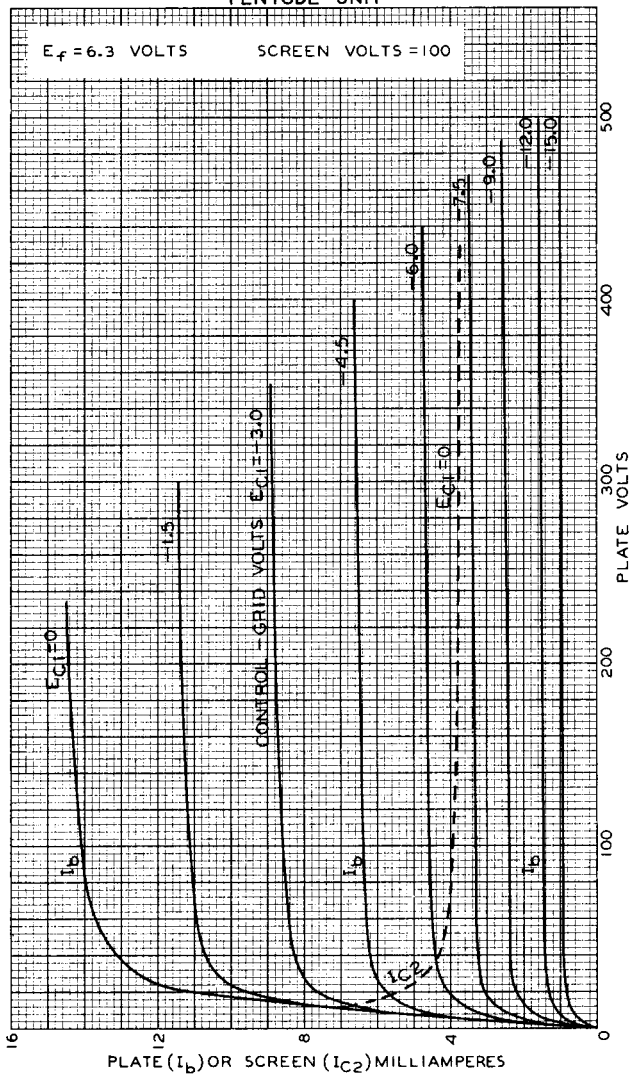

FEB. 20, 1941

 RCA RADOTRON DIVISION
 RCA MANUFACTURING COMPANY, INC.

92C-6254



6SF7

6SF7

AVERAGE PLATE CHARACTERISTICS PENTODE UNIT

