



## TRIODE-PENTODE

### DESCRIPTION AND RATING

The 6GN8 is a miniature tube containing a sharp-cutoff pentode and a high-mu triode. The pentode section is intended primarily for use as a video amplifier. The triode section is suitable for use as a voltage amplifier or sync separator.

### GENERAL

#### ELECTRICAL

Cathode - Coated Unipotential  
Heater Characteristics and Ratings  
Heater Voltage, AC or DC\* . . . 6.3±0.6 Volts  
Heater Current†. . . . . 0.75 Amperes  
Direct Interelectrode Capacitances‡

#### Pentode Section

Grid-Number 1 to Plate: (Pg1 to Pp) . . . 0.1 pf  
Input: Pg1 to (h + Pk + Pg2 + Pg3 + i.s.) . . . . . 11 pf  
Output: Pp to (h + Pk + Pg2 + Pg3 + i.s.) . . . . . 4.2 pf

#### Triode Section

Grid to Plate (Tg to Tp). . . . . 4.4 pf  
Input: Tg to (h + Tk). . . . . 2.2 pf  
Output: Tp to (h + Tk) . . . . . 0.36 pf


#### Coupling

Pentode Grid-Number 1 to Triode Plate: (Pg1 to Tp), maximum. . . 0.005 pf  
Triode Grid to Pentode Plate: (Tg to Pp), maximum . . . . . 0.018 pf  
Pentode Plate to Triode Plate: (Pp to Tp), maximum . . . . . 0.17 pf

#### MECHANICAL

Operating Position - Any  
Envelope - T-6 1/2, Glass  
Base - E9-1, Small Button 9-Pin  
Outline Drawing - EIA 6-3  
Maximum Diameter . . . . . 0.875 Inches  
Maximum Over-all Length . . . . . 2.626 Inches  
Maximum Seated Height. . . . . 2.375 Inches

#### PHYSICAL DIMENSIONS

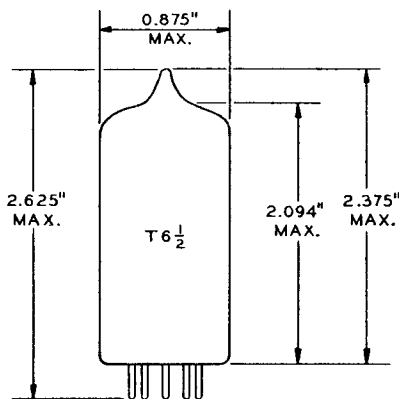


EIA 6-3

#### TERMINAL CONNECTIONS

- Pin 1 - Triode Cathode
- Pin 2 - Triode Grid
- Pin 3 - Triode Plate
- Pin 4 - Heater
- Pin 5 - Heater
- Pin 6 - Pentode Cathode, Grid Number 3, and Internal Shield
- Pin 7 - Pentode Grid Number 1
- Pin 8 - Pentode Grid Number 2 (Screen)
- Pin 9 - Pentode Plate

#### BASING DIAGRAM



EIA 9DX

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an

express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.

## MAXIMUM RATINGS

### DESIGN-MAXIMUM VALUES

	Pentode Section	Triode Section	
Plate Voltage . . . . .	330	330	Volts
Screen Supply Voltage. . . . .	330	---	Volts
Screen Voltage - See Screen Rating Chart			
Positive DC Grid-Number 1 Voltage. . . . .	0	0	Volts
Plate Dissipation . . . . .	5.0	1.0	Watts
Screen Dissipation. . . . .	1.1	---	Watts
Heater-Cathode Voltage			
Heater Positive with Respect to Cathode			
DC Component. . . . .	100	100	Volts
Total DC and Peak . . . . .	200	200	Volts
Heater Negative with Respect to Cathode			
Total DC and Peak . . . . .	200	200	Volts
Grid-Number 1 Circuit Resistance			
With Fixed Bias. . . . .	0.25	0.5	Megohms
With Cathode Bias . . . . .	1.0	1.0	Megohms

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.

## CHARACTERISTICS AND TYPICAL OPERATION

### AVERAGE CHARACTERISTICS


	Pentode Section	Triode Section	
Plate Voltage . . . . .	60	250	Volts
Screen Voltage . . . . .	150	---	Volts
Grid-Number 1 Voltage. . . . .	0 <sup>†</sup>	-2.0	Volts
Cathode-Bias Resistor . . . . .	---	---	Ohms
Amplification Factor . . . . .	---	100	
Plate Resistance, Approximate . . . . .	---	37000	Ohms
Transconductance . . . . .	---	2700	Micromhos
Plate Current . . . . .	55	2.0	Milliamperes
Screen Current . . . . .	18	---	Milliamperes
Grid-Number 1 Voltage, Approximate			
I <sub>b</sub> = 10 Microamperes . . . . .	---	-5	Volts
Grid-Number 1 Voltage, Approximate			
I <sub>b</sub> = 100 Microamperes. . . . .	---	---	Volts

### NOTES

- \* The equipment designer should design the equipment so that heater voltage is centered at the specified bogey value, with heater supply variations restricted to maintain heater voltage within the specified tolerance.
- † Heater Current of a bogey tube at E<sub>f</sub> = 6.3 volts.
- § Without external shield.
- ¶ Applied for short interval (two seconds maximum) so as not to damage tube.


**SCREEN RATING CHART**

PENTODE SECTION

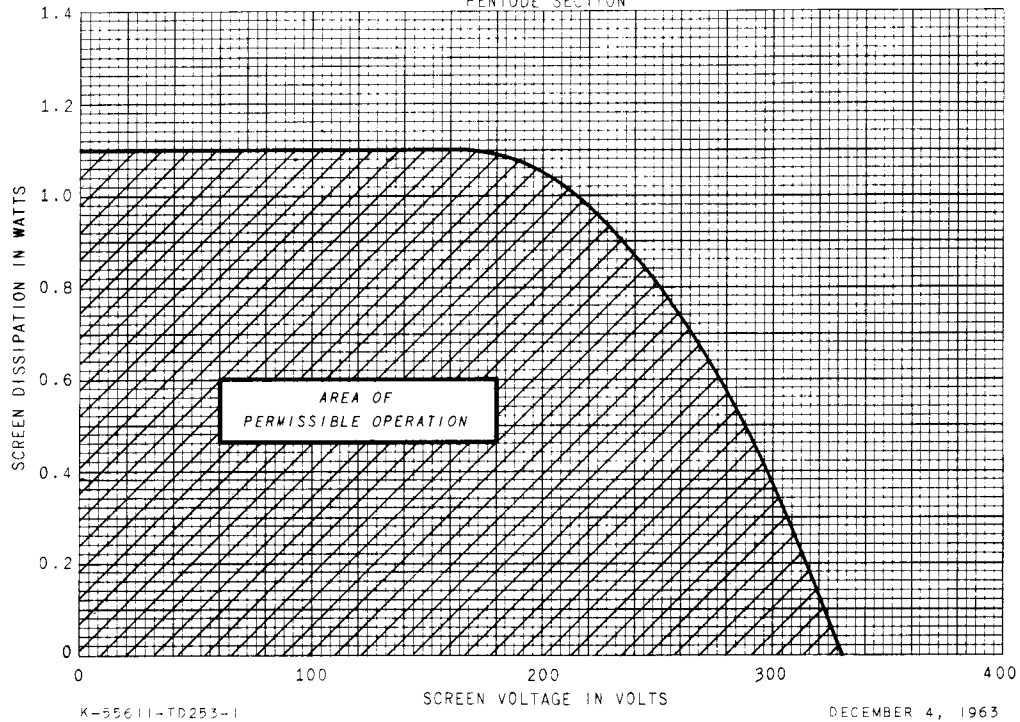


**AVERAGE PLATE CHARACTERISTICS**


PENTODE SECTION

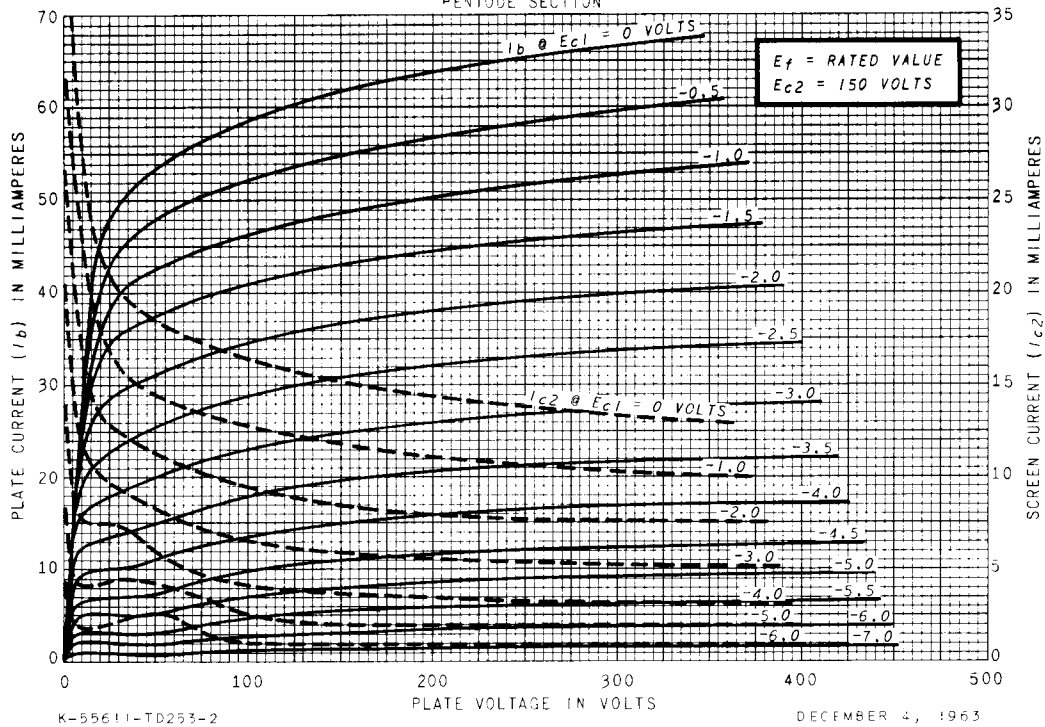

**AVERAGE PLATE CHARACTERISTICS**

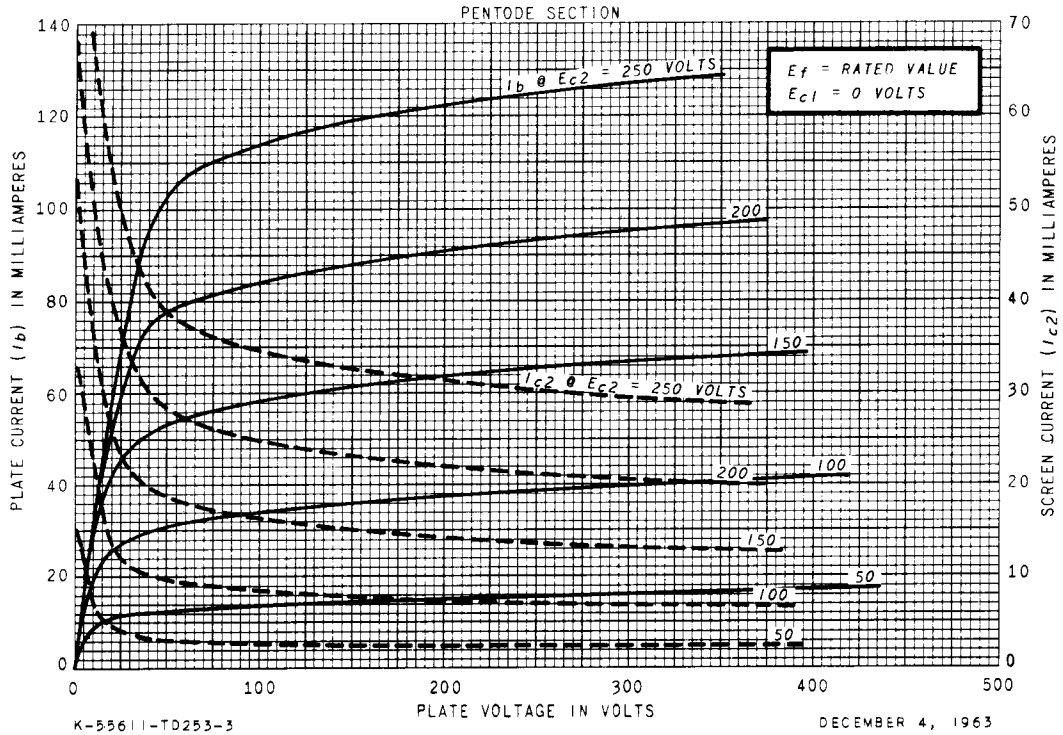


**AVERAGE TRANSFER CHARACTERISTICS**

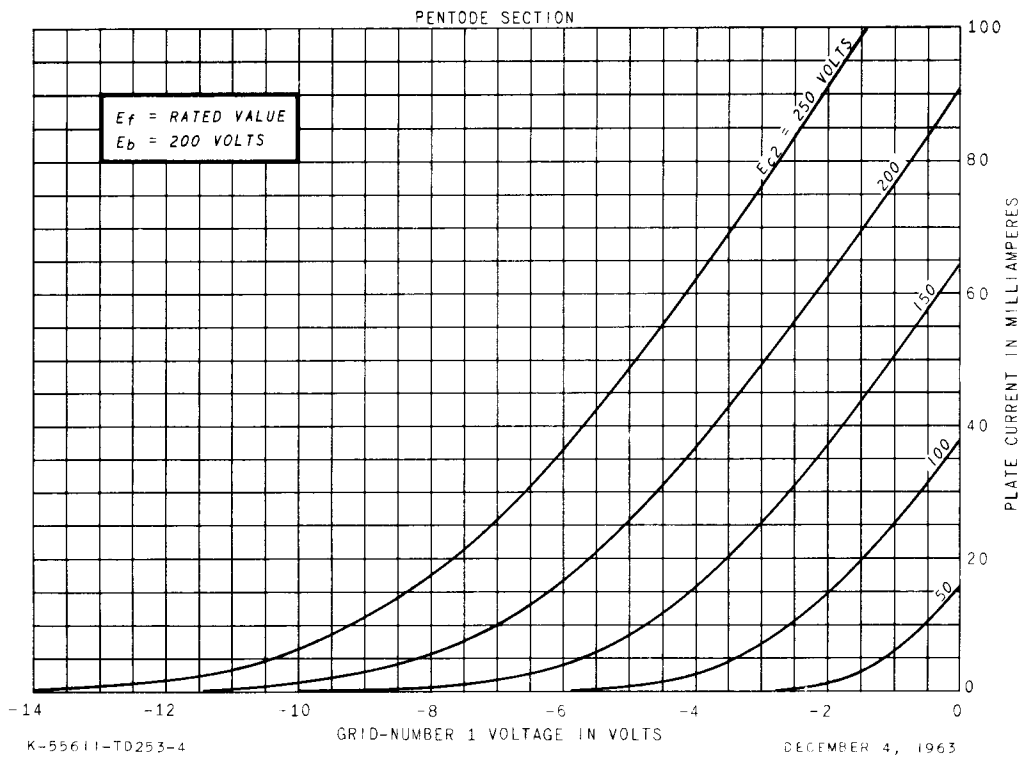


### AVERAGE TRANSFER CHARACTERISTICS

PENTODE SECTION

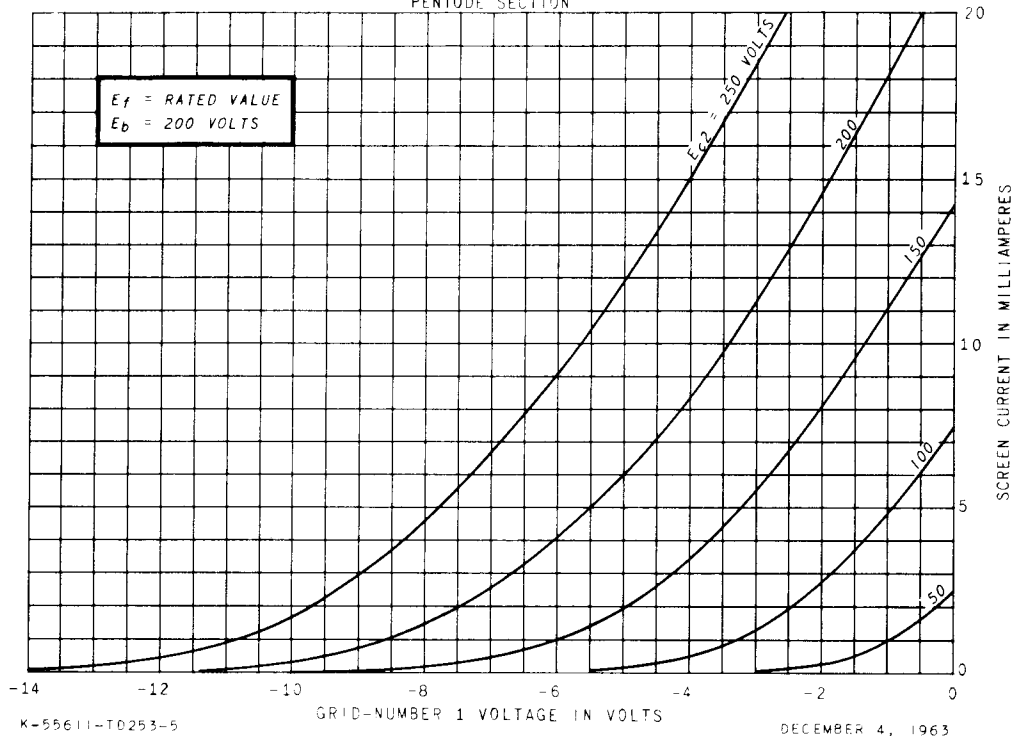


### AVERAGE TRANSFER CHARACTERISTICS


PENTODE SECTION

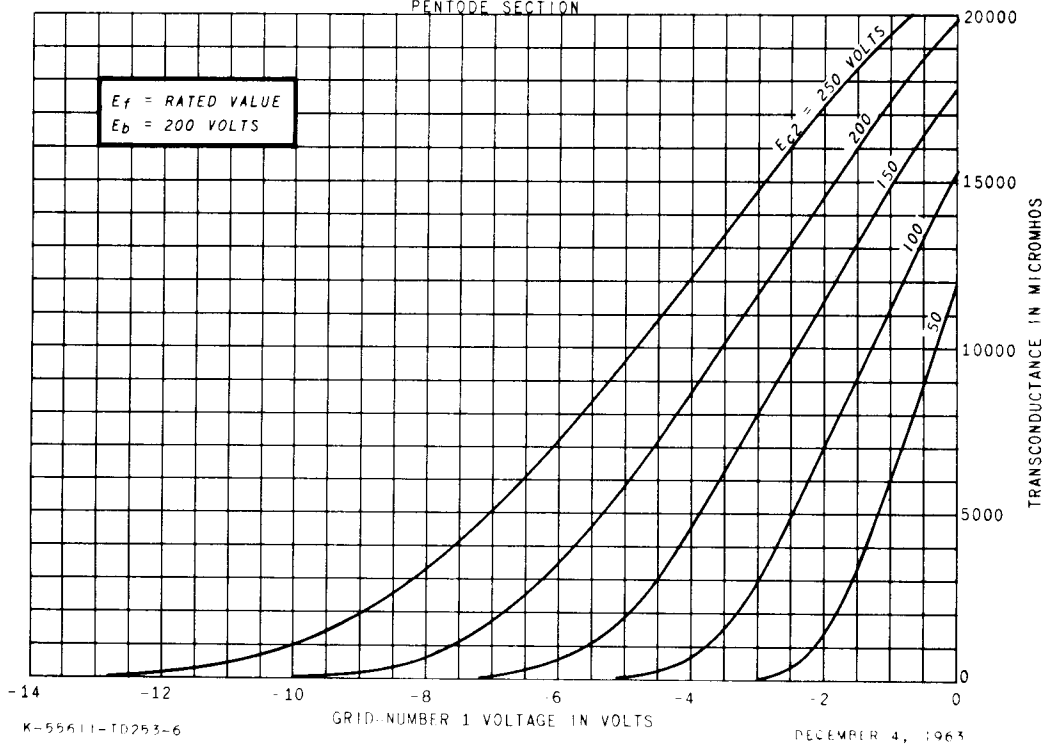

### AVERAGE PLATE CHARACTERISTICS

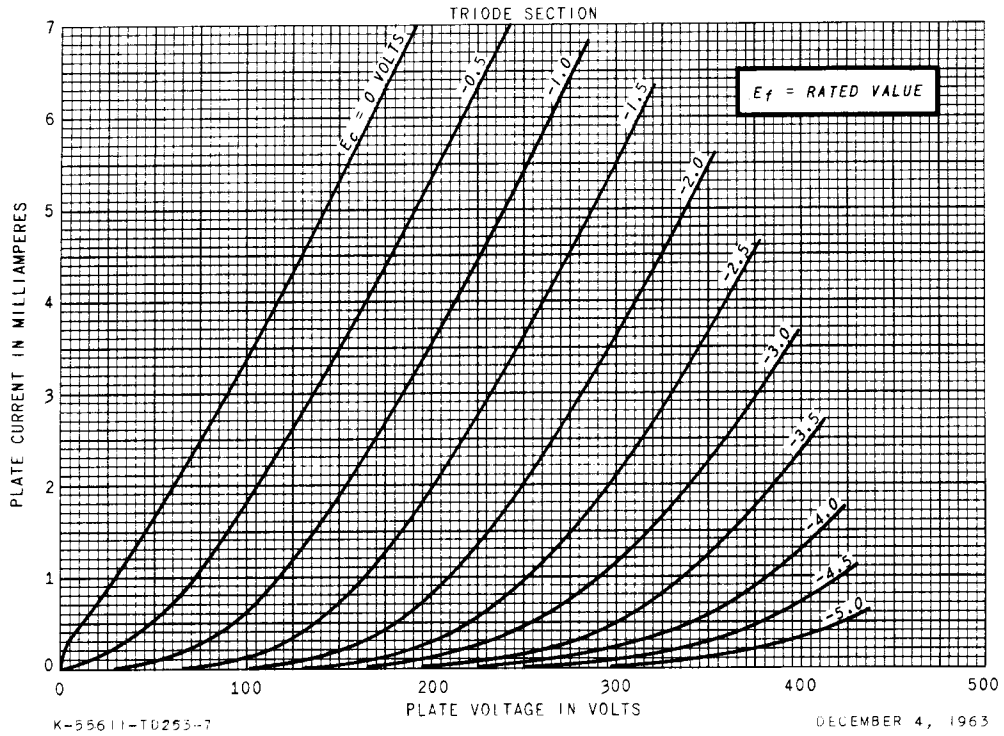

### AVERAGE TRANSFER CHARACTERISTICS

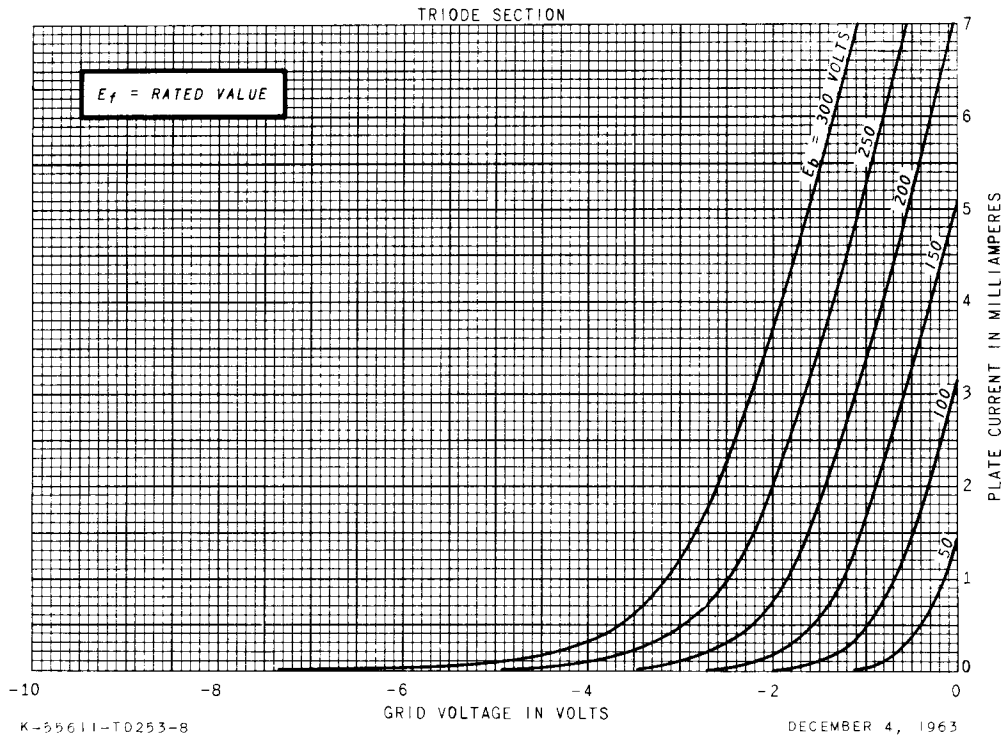

### AVERAGE CHARACTERISTICS

